



Page 1 of 3

WHITELINE Performance pitch-stopmount is designed to significantly improve engine power delivery to wheels by removing unwanted engine float/twist.

- Raise vehicle evenly and safely support.

Never rely on a Jack only.



Performance Pitch-Stop Mount

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

Application - Mazda 3 inc MPS
- Ford Focus inc RS


Always refer complete catalogue listing

Contents - 1x performance aluminium mount with poly bushing
- 1x M12 Allen Bolt
- Grease



- Proceed to remove OE mount - unbolt the 2 bolts as per images.

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.

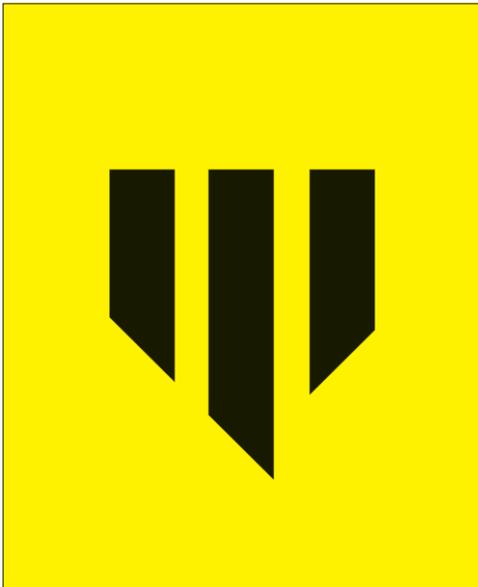

Performance Pitch-Stop Mount

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.


Continued - Page 2 of 3

- Remove old mount from vehicle



- Loosen steel bracket to assist with install - refer left image.
- Lightly grease new mount bushing face - this will help with install. Place in position as per left image.

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.

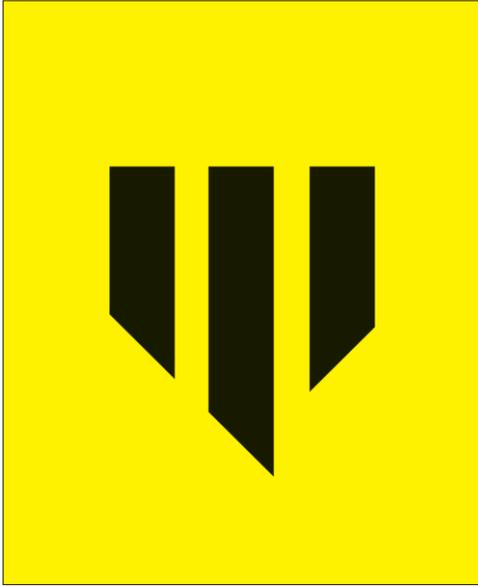

Performance Pitch-Stop Mount

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

Continued - Page 3 of 3

- Bolt up new mount as per image below.
- Tighten all bolts to 65 Nm
- Road test - then re-check all bolts after 100kms travelled.



N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.